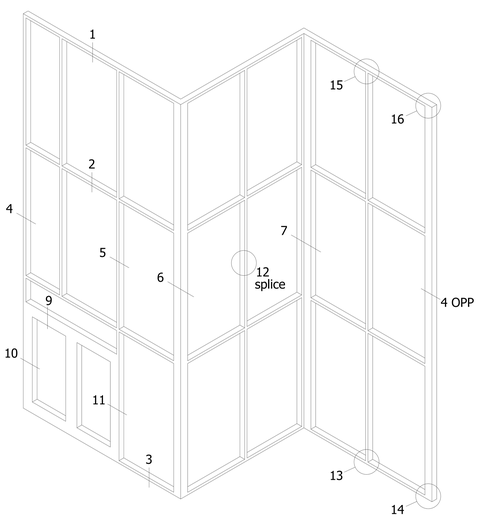

TYPICAL ELEVATION

200CW SERIES

200CW SERIES CURTAINWALL , 6 INCH



1
HEAD
STANDARD



1A
HEAD
OPTIONAL



1B
HEAD
OPTIONAL



2
HORIZONTAL
STANDARD



3
SILL
STANDARD



3A
SILL
OPTIONAL



3B
SILL
OPTIONAL



9
STANDARD
TRANSOM



9A
OPTIONAL
TRANSOM



9B
OPTIONAL
TRANSOM



4
STANDARD
TUBULAR JAMB



4A
OPTIONAL
OPEN BACK JAMB



4B
OPTIONAL
TUBULAR JAMB



4C
OPTIONAL
TUBULAR JAMB WITH "F" JAMB ANCHOR



5
STANDARD
INTERMEDIATE VERTICALS



5A
STANDARD
SILICONE GLAZED VERTICALS



5B
OPTIONAL
SCREW APPLIED HORN



10
STANDARD
DOOR JAMB



10A
OPTIONAL
DOOR JAMB



11
OPTIONAL
SCREW APPLIED HORN



6
OUTSIDE CORNER
STANDARD



6A
90 OUTSIDE CORNER - SSG
STANDARD



6B
CORNER
OPTIONAL



7
90 INSIDE CORNER - SSG
STANDARD





12
SPLICE
STANDARD





12A
SPLICE SSG
STANDARD



15
T-ANCHOR
STANDARD



16
F-ANCHOR
STANDARD



13
T-ANCHOR
STANDARD



14
F-ANCHOR
STANDARD



ALTERNATE INFILLS
FIELD GLAZE

GLASS SHOWN DOES NOT NECESSARILY REPRESENT FINAL CONFIGURATION.
CONSULT GLASS MANUFACTURER FOR SPECIFIC GLASS MAKE UP.

TUBELITE®

DEPENDABLE

LEADERS IN ECO-EFFICIENT STOREFRONT, CURTAINWALL AND ENTRANCE SYSTEMS

Last Revised: 03-19-2019